




JOB NO.:	DWG NO.:	TITLE:
DATE:	SCALE:	<b>SU40 Program Unit</b>
DWN: NM	SIZE: A4	
CLIENT:		
 539 GLENMORE ROAD, EDGECLIFF NSW 2027 PH: +61-2-9363 3029 FAX: +61-2-9327 7827 email address: sales@hertzelectronics.com.au hertz web site: WWW.hertzelectronics.com.au   Hertz Electronics Pty Ltd A.B.N. 24 002 885 967		

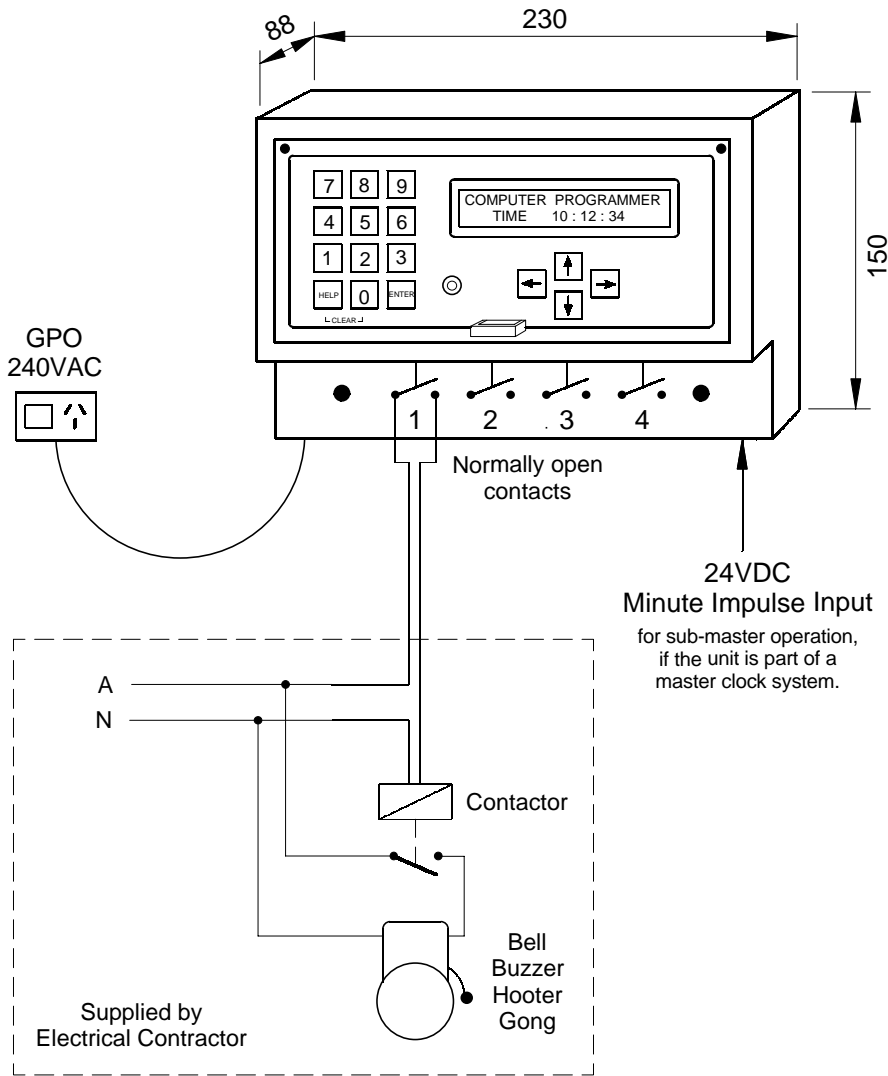

## SU40 Programmer

4x Independent Relay outputs  
for bells, lighting, airconditioning, etc.

<b>Mains:</b>	230/240VAC 50Hz, 6VA
<b>Time Base:</b>	Quartz crystal accuracy +/- 0.1 sec/day
<b>Output Circuits:</b>	4x floating relay contacts normally open 250VAC 4A
<b>Memory Capacity:</b>	256 memories with block formation (1792)
<b>Manual Override:</b>	Yes, for each circuit
<b>Signal Duration:</b>	Impulse (1-99sec) or on/off programming daily, weekly, yearly and fortnightly
<b>Repetitive Impulsing:</b>	Yes, up to 15x times
<b>Resolution:</b>	Seconds
<b>Battery Backup:</b>	Approx. 3 Months
<b>Holiday Program:</b>	3x Subprograms
<b>Daylight Saving:</b>	Off, Automatic, or Date
<b>Operating Mode:</b>	'Stand alone' or 'Slave' 24VDC 3mA impulse input for master clock systems with polereversing minute impulses